

LP7110L

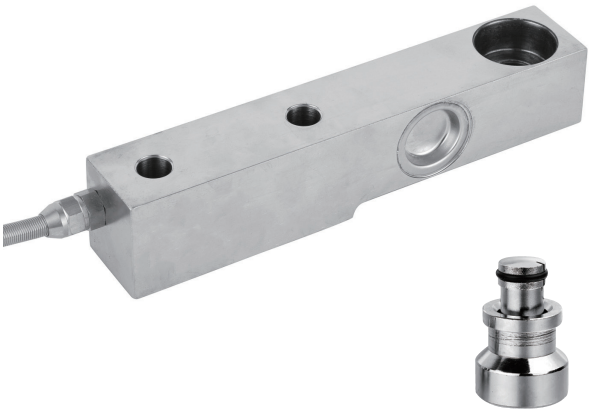

Dimensions:

Unit (mm)

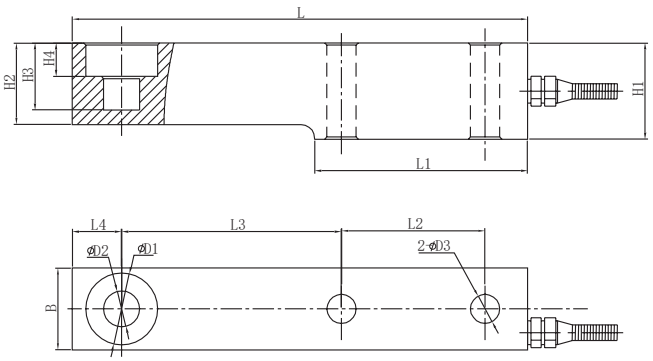

Rated Capacity	500kg, 1/2/3/5/7/8/10/15/20t
Accuracy Class	C3
Rated Output	2.0±0.002mV/V
Temperature effect on Zero	±0.02%F.S/10°C
Temperature effect on Sensitity	±0.02%F.S/10°C
Creep (30min)	±0.02%F.S
Input Resistance	385±10Ω
Output Resistance	351±2Ω
Operating Temperature Range	-30~+70°C
Insulation Resistance	≥5000MΩ （at 50VDC）
Safe Overload	150%F.S
Destructive Load	300%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Alloy steel or stainless steel
Protection class	IP68
Application for	Floor scales, Pallet scales, Weighing modules, etc.


Cable length:

4 Core cable standard lengths: 3m(500kg~3t), 6m(5~7.5t),10m(10t),14m(15~20t)

Diameter: Φ5

Option: Customized cable length

Connection mode:

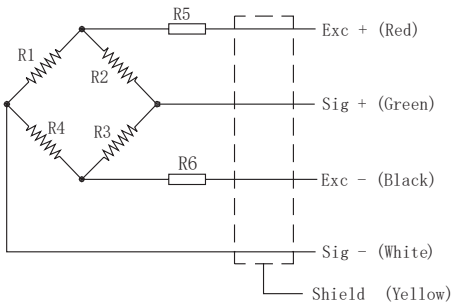

Dimension / Capacity	L	L1	L2	L3	L4	H1	H2	H3	H4	B	D1	D2	D3
500kg~3t	203	95	64	98	22	43	36.6	30.5	8	36.6	32	16	13
5~7.5t	235	110	66	124	22	52	48	30	12	48	38	22	21
10t	279	133	82	140	32	67	60	20	8.5	60	48	32	28
15~20t	318	153	89	159	38	82.5	70	24	9.5	70	54	38	34