

LP7110

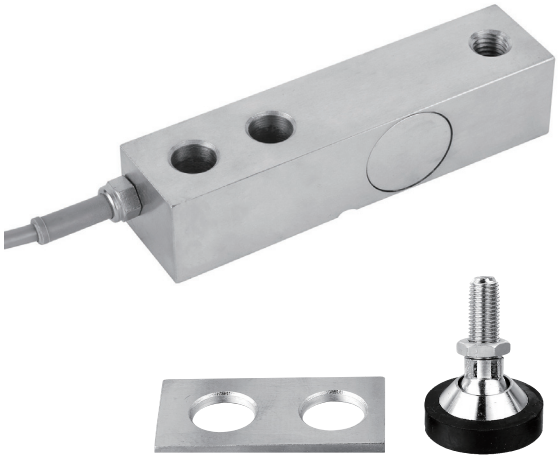

Dimensions:

Unit (mm)

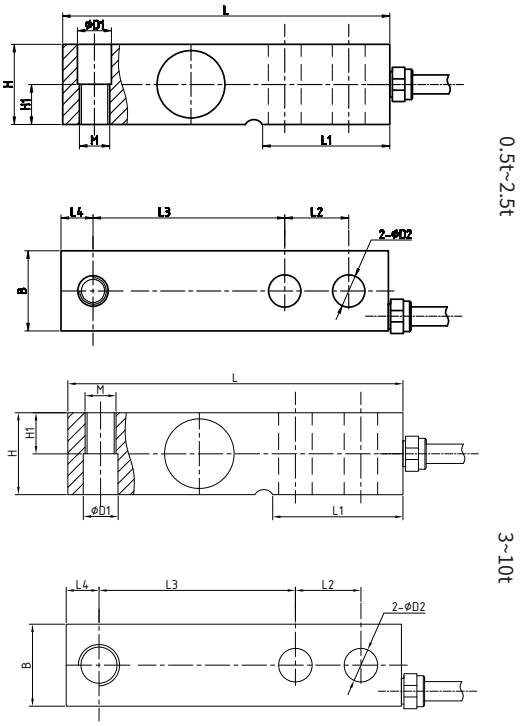

Rated Capacity	0.5/1/1.5/2/2.5/3/5/7.5/10t
Accuracy Class	OIML C3
Rated Output	2.0±0.002mV/V 3.0±0.003mV/V
Temperature effect on Zero	±0.02%F.S/10°C
Temperature effect on Sensitity	±0.02%F.S/10°C
Creep (30min)	±0.02%F.S
Input Resistance	385±10Ω
Output Resistance	351±2Ω
Operating Temperature Range	-30~+70°C
Insulation Resistance	≥5000MΩ （at 50VDC）
Safe Overload	150%F.S
Destructive Load	300%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Alloy steel or stainless steel
Protection class	IP67/IP68
Application for	Floor scales, Pallet scales, Weighing modules, etc.

Cable length:


4 Core cable standard

lengths:3m(1~2.5t),6m(3~10t)

Diameter: Φ5

Option: Customized cable length

Connection mode:

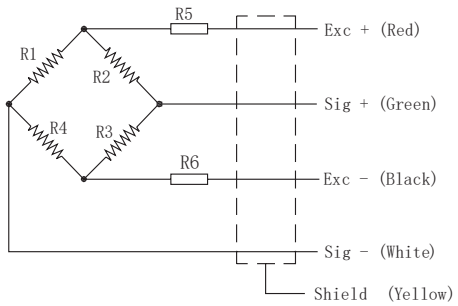

Dimension / Capacity	L	L1	L2	L3	L4	H	H1	B	D1	D2	M
0.5~2.5t	130	54	25.4	76.2	12.7	31.8	16.0	31.8	13.5	13	M12*1.75
3~5t	171.5	72.6	38.1	95.3	19	38.1	19.1	38.1	19.8	19.8	M20*1.5
7.5~10t	225.6	102	50.8	123.9	25.4	50.8	25.4	50.8	27	27	M24*2