
LP7115



Dimensions:

Unit (mm)

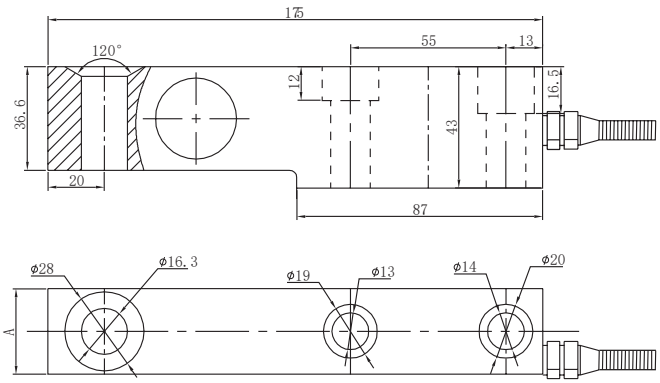

Rated Capacity	500kg, 1/2/3/4t
Accuracy Class	C3
Rated Output	1.5±0.002mV/V 2±0.002mV/V
Temperature effect on Zero	±0.02%F.S/10°C
Temperature effect on Sensitity	±0.02%F.S/10°C
Creep (30min)	±0.02%F.S
Input Resistance	385±10Ω
Output Resistance	351±2Ω
Operating Temperature Range	-30~+70°C
Insulation Resistance	≥5000MΩ （at 50VDC）
Safe Overload	150%F.S
Destructive Load	300%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Alloy steel or stainless steel
Protection class	IP67
Application for	Floor scales, Pallet scales


Cable length:

4 Core cable standard lengths: 3m(500kg,1-4t)

Diameter: Φ5

Option: Customized cable length

Connection mode:

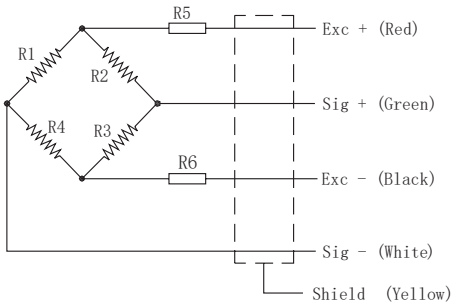

Capacity	A
500kg,1t,2t	30.3
3~4t	36.6