
LP7120C



Dimensions:

Unit (mm)

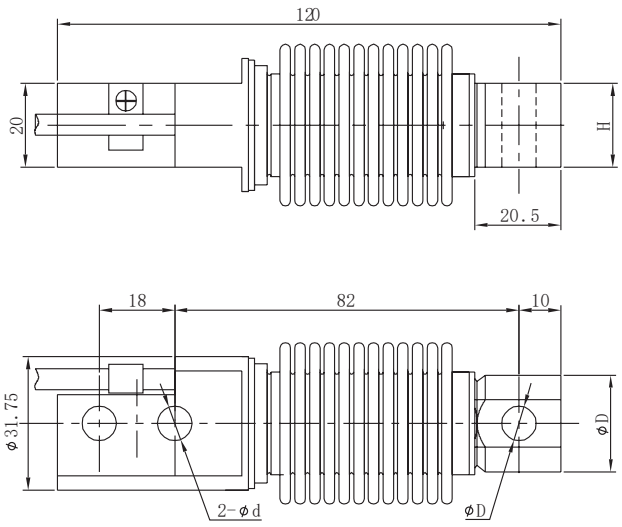

Rated Capacity	5/10/20/30/40/50/75/100/150/200/250/300/500kg
Accuracy Class	C3
Rated Output	2.0±0.002mV/V
Temperature effect on Zero	±0.02%F.S/10°C
Temperature effect on Sensitity	±0.02%F.S/10°C
Creep (30min)	±0.02%F.S
Input Resistance	400±20Ω
Output Resistance	351±2Ω
Operating Temperature Range	-30~+70°C
Insulation Resistance	≥5000MΩ（at 50VDC）
Safe Overload	150%F.S
Destructive Load	300%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Alloy steel or stainless steel
Protection class	IP68
Application for	Floor scales, Pallet scales, Weighing modules, etc.


Cable length:

4 Core cable standard lengths: 3m(5~500kg)

Diameter: Φ5

Option: Customized cable length

Connection mode:

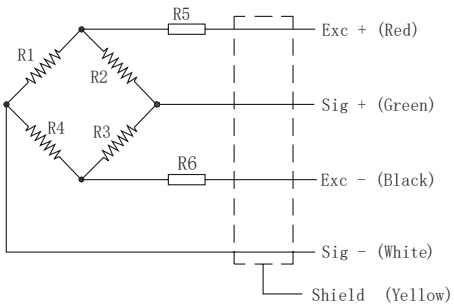

Capacity	d	D	H
5,10,20,30,40,50,75,100,150,200	8.2	23	20
250,300,500kg	10.2	24	19