

LP7120E



Dimensions:

Unit (mm)

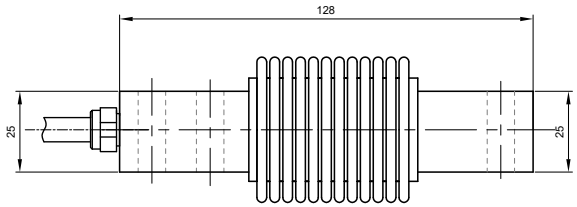

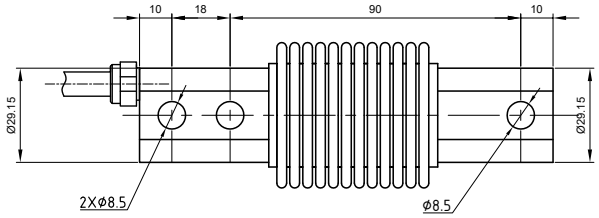

Rated Capacity	15/30/60/100/150/300 kg
Accuracy Class	C3
Rated Output	2.0±10% mV/V
Total error	±0.01% F.S
Creep（30min）	±0.01% F.S
Input Resistance	410±10Ω
Output Resistance	351±2Ω
Operating Temperature Range	-30~+70°C
Insulation Resistance	≥5000MΩ （at 50VDC）
Safe Overload	150%F.S
Destructive Load	200%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Alloy Steel

Cable length:

4 Core cable standard lengths: 3m(5~500kg)

Diameter: Φ5

Option: Customized cable length

Connection mode:

