
LP7130



Dimensions:

Unit (mm)

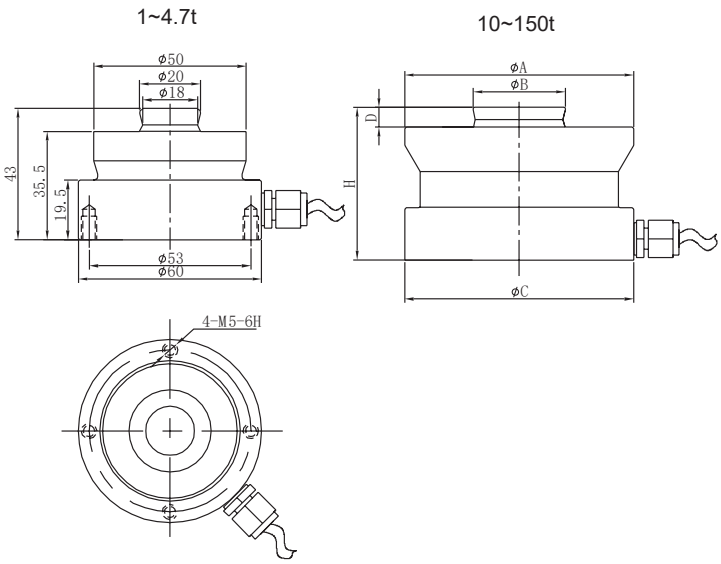

Rated Capacity	1/2.2/3.3/4.7/10/15/22/33/47/68/100/150t
Total error	±0.03%F.S
Rated Output	2.85±0.005mV/V
Temperature effect on Zero	±0.03%F.S/10°C
Temperature effect on Sensitity	±0.03%F.S/10°C
Creep (30min)	±0.03%F.S
Input Resistance	1450±10Ω
Output Resistance	1450±5Ω
Operating Temperature Range	-30~+70°C
Insulation Resistance	≥5000MΩ （at 50VDC）
Safe Overload	150%F.S
Destructive Load	300%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Alloy steel or stainless steel
Protection class	IP68
Application for	Hopper, Silo, Tundish scales, Weighing modules, etc.


Cable length:

4 Core cable standard lengths: 8m(1~4.7t),12m (33~22t),16m(47~150t)

Diameter: Φ5

Option: Customized cable length

Connection mode:

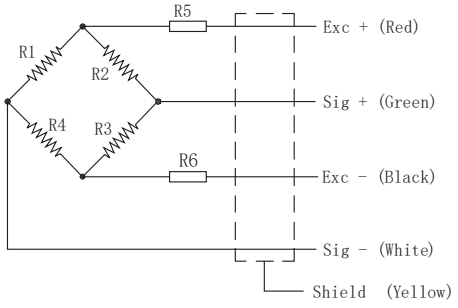

Capacity \ Dimension	A	B	C	D	H
10~22t	75	30	75	6.5	50
33t	95	40	95	10	65
47t	130	60	130	14	75
68t	130	60	130	14	85
100t	150	70	150	16	90
150t	150	70	150	16	100