

LP7131

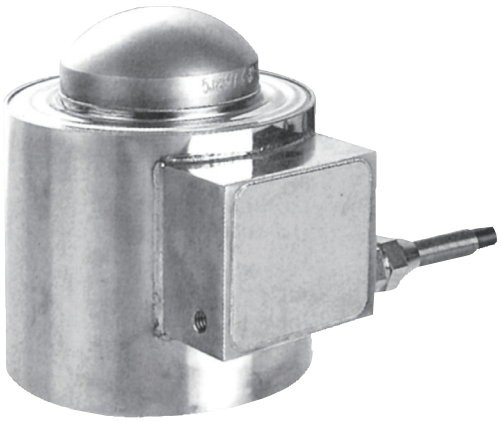

Dimensions:

Unit (mm)

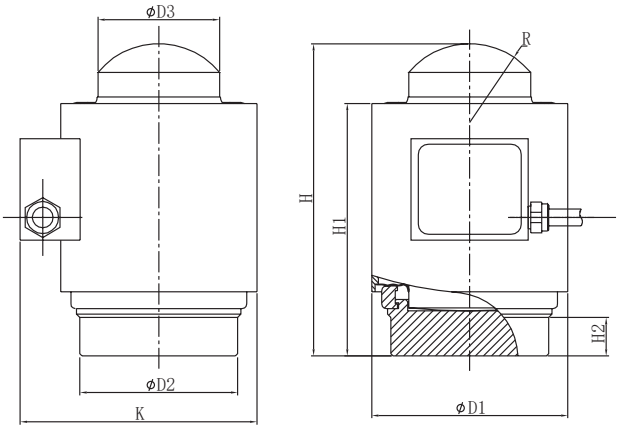

Rated Capacity	2/5/10/20/30/50/75/100/150/200/250/300t
Total error	±0.03%F.S
Rated Output	1.0±0.002mV/V
Temperature effect on Zero	±0.03%F.S/10°C
Temperature effect on Sensitity	±0.03%F.S/10°C
Creep (30min)	±0.03%F.S
Input Resistance	650±10Ω
Output Resistance	610±2Ω
Operating Temperature Range	-30~+70°C
Insulation Resistance	≥5000MΩ （at 50VDC）
Safe Overload	150%F.S
Destructive Load	300%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Alloy steel or stainless steel
Protection class	IP68
Application for	Hopper, Silo, Tundish Scales, Weighing modules, etc.


Cable length:

4 Core cable standard lengths: 8m(2~5t),14m (10~50t),18m(200~300t)

Diameter: Φ5

Option: Customized cable length

Connection mode:

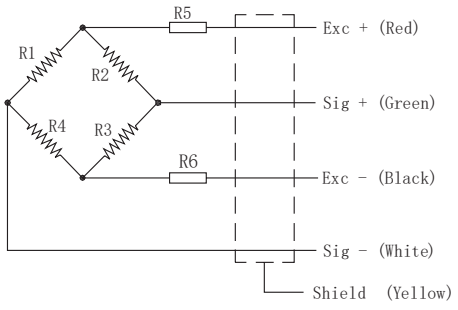

Dimension / Capacity	H	H1	H2	D1	D2	D3	R	K
2~5t	138.5	112	17	89	70	24	15	106
10~50t	138.5	112	17	89	70	54	35	106
100t	200	167	40	120	105	76	50	138
200~300t	270	220	50	159	143	108	70	180