

LP7132

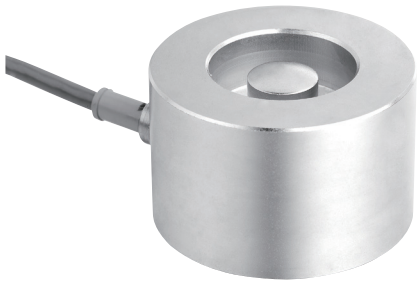

Dimensions:

Unit (mm)

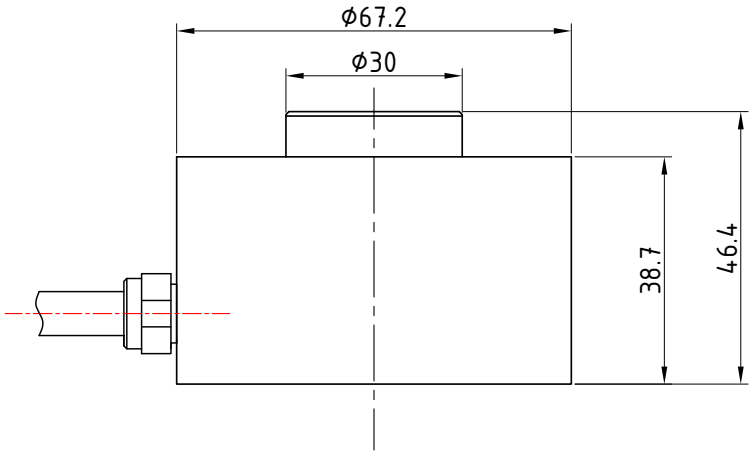

Rated Capacity	0.5/1/2/3/5t
Total error	±0.05%F.S
Rated Output	2.0±0.002mV/V
Temperature effect on Zero	±0.03%F.S/10℃
Temperature effect on Sensitity	±0.03%F.S/10℃
Creep (30min)	±0.03%F.S
Input Resistance	650±10Ω
Output Resistance	610±2Ω
Operating Temperature Range	-30~+70℃
Insulation Resistance	≥5000MΩ (at 50VDC)
Safe Overload	150%F.S
Destructive Load	300%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Alloy steel or stainless steel
Protection class	IP67
Application for	Hopper, Soil, Weighing modules, etc.

Circuit Diagram:

4 Core cable standard lengths: 6m(500kg~5t)

Diameter: Φ5

Option: Customized cable length

Connection mode:

