

LP7133

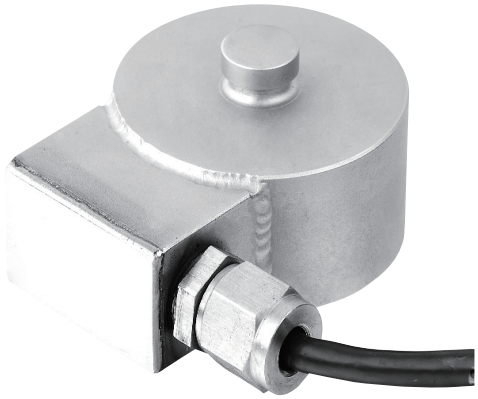

Dimensions:

Unit (mm)

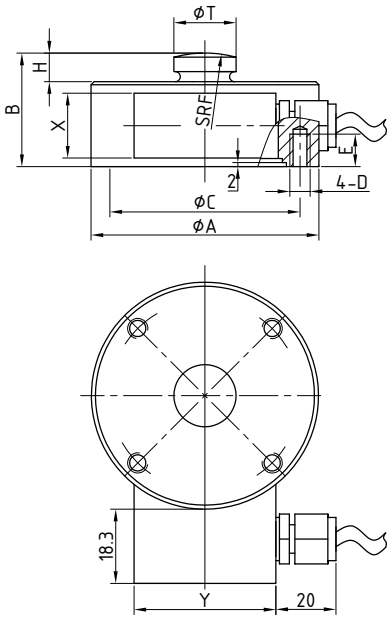

Rated Capacity	50/100/200/500kg, 1/2/5/10/20/30/50t
Total error	±0.3%F.S
Rated Output	2.0±0.05mV/V
Temperature effect on Zero	±0.03%F.S/10°C
Temperature effect on Sensitity	±0.03%F.S/10°C
Creep (30min)	±0.05%F.S
Input Resistance	385±10Ω
Output Resistance	350±2Ω
Operating Temperature Range	-30~+70°C
Insulation Resistance	≥5000MΩ （at 50VDC）
Safe Overload	150%F.S
Destructive Load	200%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Alloy steel or stainless steel
Protection class	IP68
Application for	Hopper, Soil, Weighing modules, etc.


Cable length:

4 Core cable standard lengths: 3m(50kg~1t), 6m(2~5t),12m(10~50t)

Diameter: Φ5

Option: Customized cable length

Connection mode:

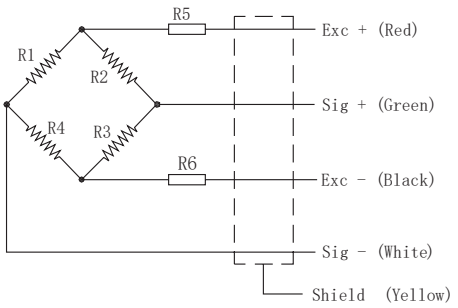

Dimension / Capacity	A	B	C	D	E	F	H	T	X	Y
50kg~1t	50	30	42	M5	7	60	7	13	20	35
2~5t	90	48	70	M10	12	100	12.5	25	30	50
10~20t	115	60	90	M12	16	160	12.5	32	30	50
30~50t	155	90	125	M16	20	300	15.5	44	30	50