
LP7133B



Dimensions:

Unit (mm)

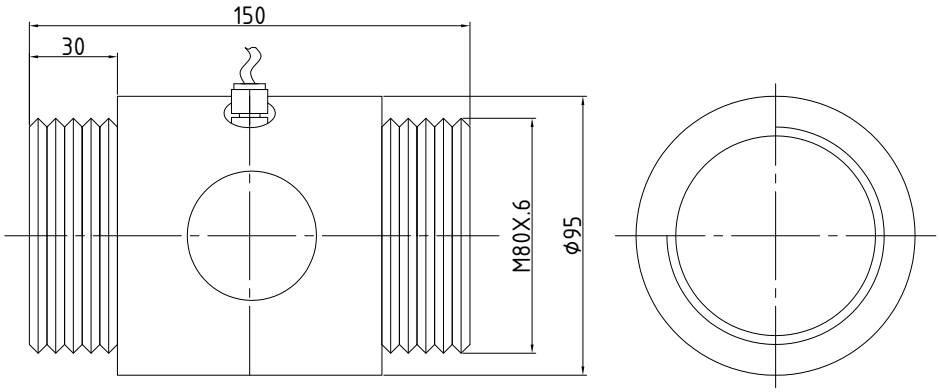

Rated Capacity	10/20/30/40t
Accuracy Class	D1
Rated Output	2.0±0.002mv/v
Non-linearity	±0.1% F.S
Creep (30min)	±0.03%F.S
Input Resistance	700±10Ω
Output Resistance	700±2Ω
Operating Temperature Range	-10~+40°C
Insulation Resistance	≥5000MΩ （at 50VDC）
Safe Overload	150%F.S
Destructive Load	300%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Alloy steel or stainless steel
Protection class	IP67
Application for	Hopper, Silo, Tundish scales, Weighing modules, etc.

Connection mode:

