
LP7133D

Dimensions:

Unit (mm)



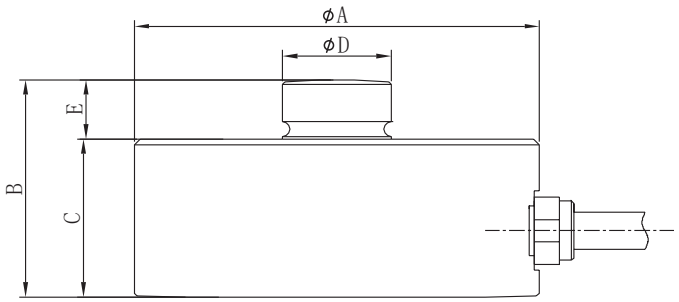

Rated Capacity	250/500kg, 1/2.5/5/7.5/10/15/30/50/100t
Total error	±0.05%F.S
Rated Output	2.0±0.002mV/V
Temperature effect on Zero	±0.02%F.S/10℃
Temperature effect on Sensitity	±0.02%F.S/10℃
Creep (30min)	±0.02%F.S
Input Resistance	750±10Ω
Output Resistance	702±2Ω
Operating Temperature Range	-30~+70℃
Insulation Resistance	≥5000MΩ (at 50VDC)
Safe Overload	150%F.S
Destructive Load	200%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Alloy steel or stainless steel
Protection class	IP68
Application for	Hopper, Silo, Tundish scales, Weighing modules, etc.

Cable length:


4 Core cable standard lengths:

5m(250kg~10t),10m(15~100t)

Diameter: Φ5

Option: Customized cable length

Connection mode:

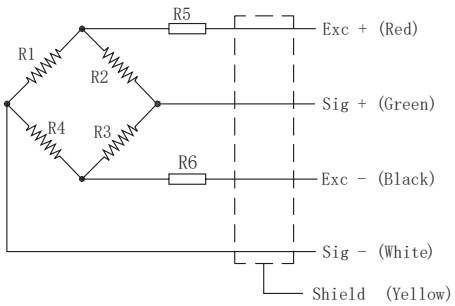

Dimension / Capacity	A	B	C	D	E
250kg~10t	82	44	32	22	12
15t	100	48.5	35	28	13.5
30t	126	54	40	35	14
50~100t	165	80	60	60	20