
LP7133JA



Dimensions:

Unit (mm)

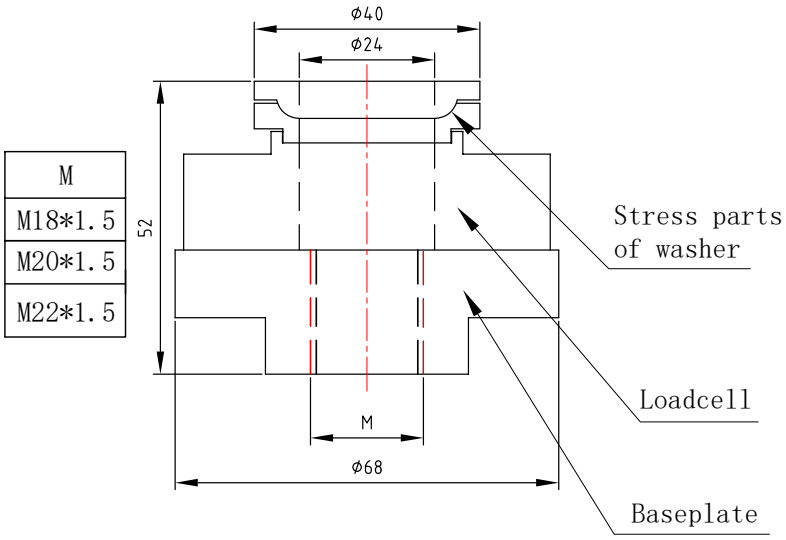

Rated Capacity	3t
Accuracy Class	D1
Rated Output	1.5±0.01mV/V
Non-linearity	±0.05% F.S
Creep (30min)	±0.03% F.S
Input Resistance	750±20Ω
Output Resistance	702±3Ω
Operating Temperature Range	-10~+40°C
Insulation Resistance	≥5000MΩ (at 50VDC)
Safe Overload	150%F.S
Destructive Load	200%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Alloy steel or stainless steel, IP67
Application for	Tank scales, Compression testing situation

Connection mode:

