
# LP7133K



## Dimensions:

Unit (mm)

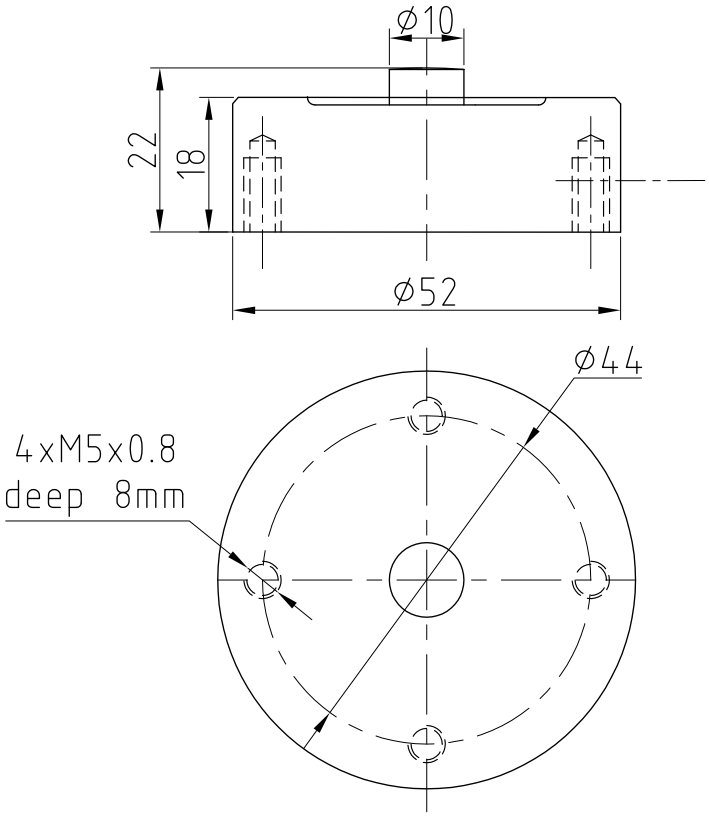


| | |
|---|---|
| Rated Capacity | 50/100/250/500/1000kg |
| Accuracy Class | D1 |
| Rated Output | 2.0±0.002mv/v |
| Non-linearity | ±0.3% F.S |
| Creep (30min) | ±0.3% F.S |
| Input Resistance | 750±10Ω |
| Output Resistance | 700±2Ω |
| Operating Temperature Range | -10~+40°C |
| Insulation Resistance | ≥5000MΩ （at 50VDC） |
| Safe Overload | 150%F.S |
| Destructive Load | 200%F.S |
| Excitation Recommend | 4~12VDC Max:15VDC |
| Construction | Alloy steel or stainless steel, IP67 |
| Application for | Tank scales, Compression testing situation |

## Connection mode:

