

LP7133KC

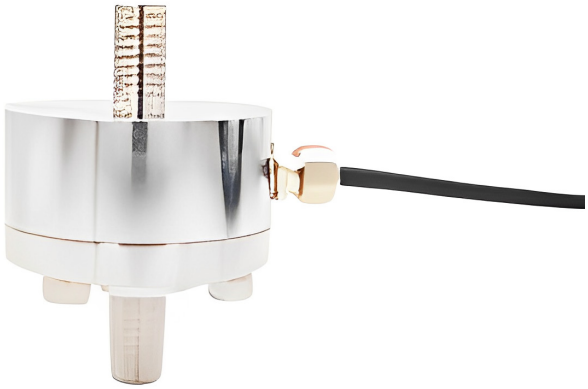


Capacity	500N 1,2,5,10,20,30,50kN
Sensitivity	1mV/V
Sensitivity tolerance	-10%~+10%
Non-linearity	±0.1% of Cn
Hysteresis	±0.1% of Cn
Creep,DR	±0.1%/30min
Repeatability	±0.1% of Cn
Zero Balance	±0.05mV/V
Input Resistance	350±30Ω
Output Resistance	350±3Ω
Temperature effect on Zero	±0.05% of Cn
Temperature effect on Sensitivity	±0.05% of Cn
Reference Voltage	5V
Operation Voltage	1-15V
Nominal temperature range	-10~+40°C
Service temperature range	-10~+50°C
Storage temperature range	-25~+70°C
Insulation Resistance	>5GΩ/100V
Safe load limit	150% of Emax
Breaking load limit	300% of Emax
Protection class	IP66

Dimensions:

Unit (mm)

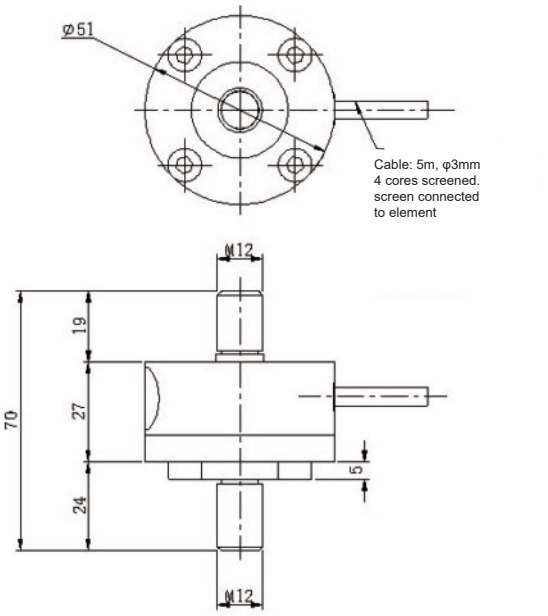

Load direction:

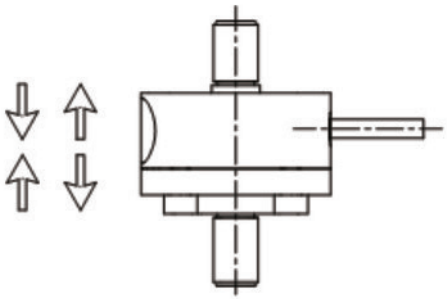

Features:

· Stainless steel
· Low profile, tension and compression
· Protection Class IP66
· Mainly used for press machines and press fitting equipment,can be designed according to the actual press
· Plug connect option

Connection mode:

