
LP7133N




Dimensions:

Unit (mm)

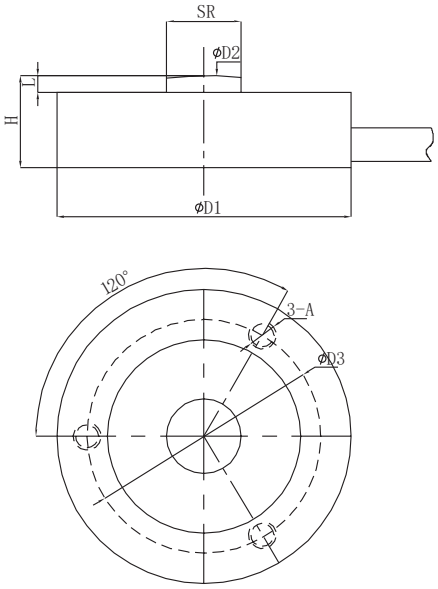

Rated Capacity	200/500lb,1/2/3/5klb
Rated Output	0.5~1.0mV/V
Total error	±0.5%F.S
Temperature effect on Zero	±0.03%F.S/10℃
Temperature effect on Sensitity	±0.03%F.S/10℃
Creep (30min)	±0.03%F.S
Input Resistance	350±5Ω
Output Resistance	350±2Ω
Operating Temperature Range	-30~+70℃
Insulation Resistance	≥5000MΩ (at 50VDC)
Safe Overload	150%F.S
Destructive Load	200%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Stainless steel
Protection class	IP67
Application for	Hopper, Soil, Testing machine, etc.

Connection mode:

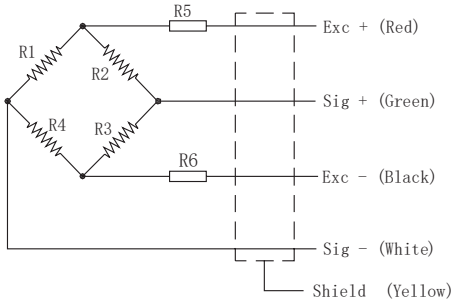

Dimension / Capacity	D1	D2	D3	H	L	A	SR
200lb~2klb	32	8.1	25.4	10	15.7	#6-32UNC	35
3~5klb	38	11	31.4	16	15.7	#6-32UNC	35