

LP7135

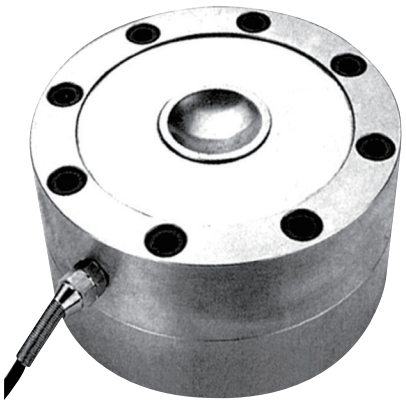

Dimensions:

Unit (mm)

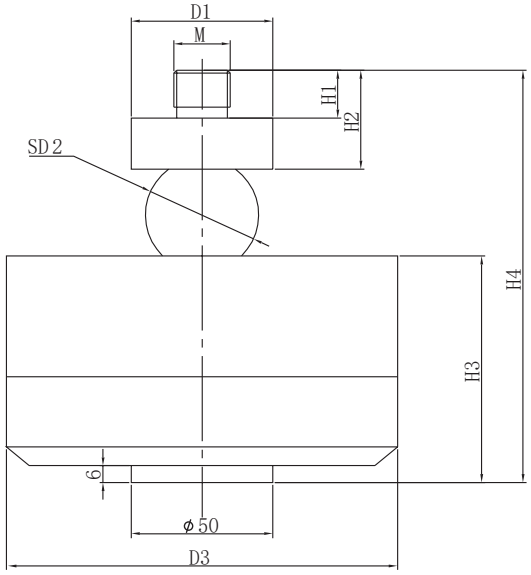

Rated Capacity	10/20/25/30/40t
Total error	±0.05%F.S
Rated Output	3.0±0.006mV/V
Temperature effect on Zero	±0.02%F.S/10°C
Temperature effect on Sensitity	±0.02%F.S/10°C
Creep (30min)	±0.05%F.S
Input Resistance	385±10Ω
Output Resistance	351±2Ω
Operating Temperature Range	-30~+70°C
Insulation Resistance	≥5000MΩ （at 50VDC）
Safe Overload	150%F.S
Destructive Load	200%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Alloy steel or stainless steel
Protection class	IP67
Application for	Hopper, Soil, Testing machine, etc.


Cable length:

4 Core cable standard lengths: 12m(10~25t), 16m(30~40t)

Diameter: Φ5

Option: Customized cable length

Connection mode:

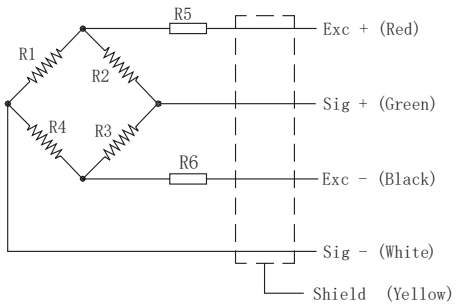

Dimension / Capacity	D1	D2	D3	M	H1	H2	H3	H4
10t	φ50	φ40	φ138	M20*1.5	17	35	74	134.5
20,25t	φ65	φ50	φ165	M24*1.5	25	50	87	171
30t	φ75	φ50.8	φ165	M30*1.5	25	55	86	176
40t	φ85	φ76.2	φ165	M40*1.5	25	65	95.8	221