

# LP7135E

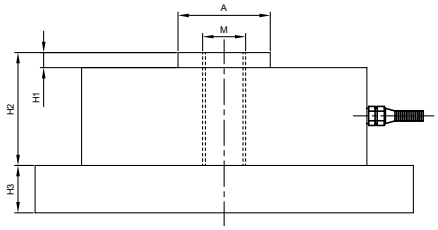

## Dimensions:


Unit (mm)

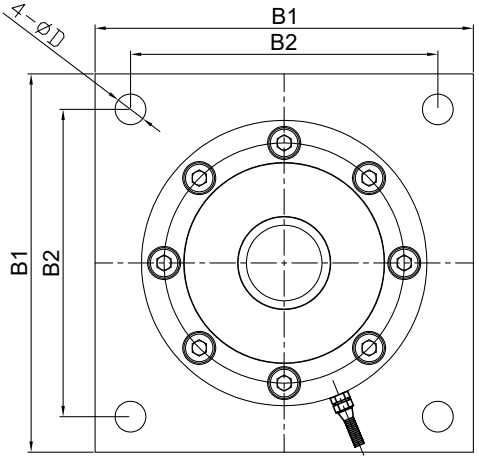


| | |
|---|---|
| Rated Capacity | 500kg,1/2/3/5/10/20/30t |
| Accuracy Class | C3 |
| Rated Output | 2.0±0.1%mv/v |
| Non-linearity | ±1% F.S |
| Creep (30min) | ±1% F.S |
| Input Resistance | 702±10Ω |
| Output Resistance | 702±2Ω |
| Operating Temperature Range | -10~+40°C |
| Insulation Resistance | ≥5000MΩ （at 50VDC） |
| Safe Overload | 150%F.S |
| Destructive Load | 200%F.S |
| Excitation Recommend | 4~12VDC Max:15VDC |
| Construction | Alloy steel or stainless steel, IP67 |
| Application for | Tank scales, Compression testing situation |

## Connection mode:

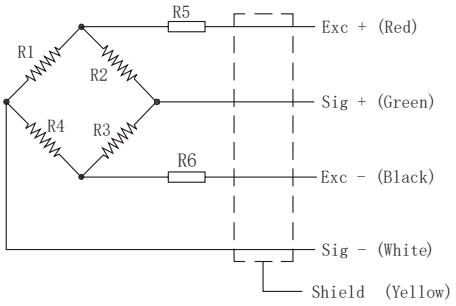


| Dimension / Capacity | A | D | M | H1 | H2 | H3 | B1 | B2 |
|---|---|---|---|---|---|---|---|---|
| 500kg,1t,2t,3t | 29 | 11 | 16 | 3 | 34.8 | 18 | 138 | 112 |
| 5t,10t | 39 | 13 | 32x2 | 6.4 | 47.8 | 20 | 160 | 130 |
| 20,30t | 50.4 | 18 | 39x3 | 6.4 | 57.2 | 25 | 170 | 133 |