

LP7135H



Dimensions:


Unit (mm)

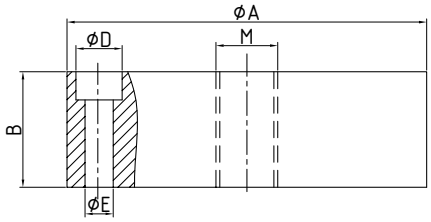

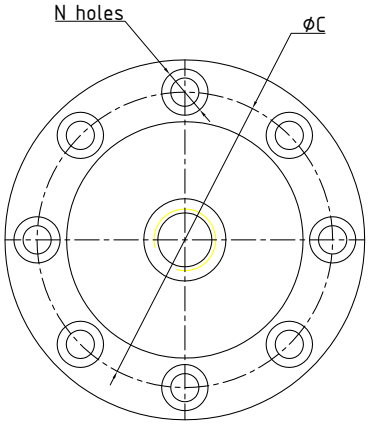

Rated Capacity	250kg,500kg,1/2/2.5/3/5t
Accuracy Class	C3
Rated Output	2.0±0.1%mv/v
Non-linearity	±1% F.S
Creep (30min)	±1% F.S
Input Resistance	750±30Ω
Output Resistance	702±2Ω
Operating Temperature Range	-10~+40°C
Insulation Resistance	≥5000MΩ (at 50VDC)
Safe Overload	150%F.S
Destructive Load	200%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Alloy steel or stainless steel, IP67
Application for	Tank scales, Compression testing situation

Connection mode:

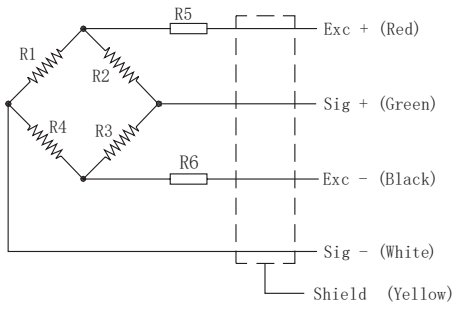

Dimension / Capacity	A	B	C	D	E	M	N
250~500kg	75	25	57	11	6.5	M10*1.5	6 holes
1~2.5t	90	25	366	15	8.5	M12	6 holes
5t	140	45	115	18	11	M24*3	8 holes