

LP7136

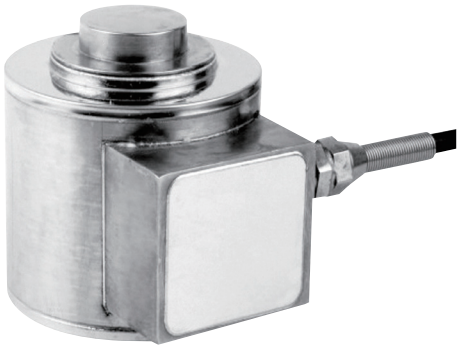

Dimensions:

Unit (mm)

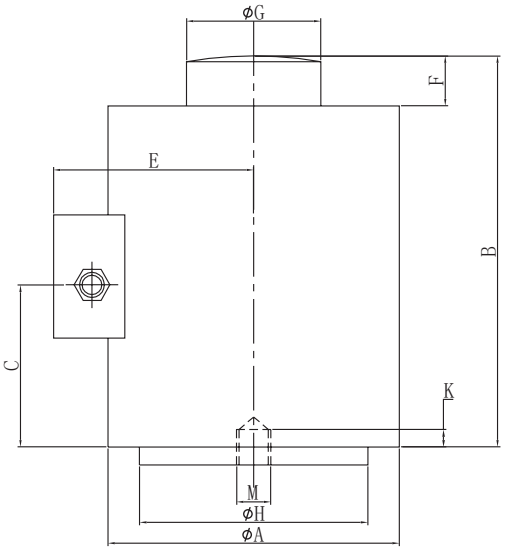

Rated Capacity	20/25/30/40/50/60/70/100/150/200/300/400t
Total error	±0.05%F.S
Rated Output	2.0±0.002mV/V
Temperature effect on Zero	±0.02%F.S/10°C
Temperature effect on Sensitity	±0.02%F.S/10°C
Creep (30min)	±0.02%F.S
Input Resistance	385±10Ω
Output Resistance	350±2Ω
Operating Temperature Range	-30~+70°C
Insulation Resistance	≥5000MΩ （at 50VDC）
Safe Overload	150%F.S
Destructive Load	200%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Alloy steel or stainless steel, IP68
Protection class	IP68
Application for	Hopper, Soil, Testing machine, etc.


Cable length:

4 Core cable standard lengths: 12m(20t),14m (25~40t),16(50~150t),20m(200~400t)

Diameter: Φ6

Option: Customized cable length

Connection mode:

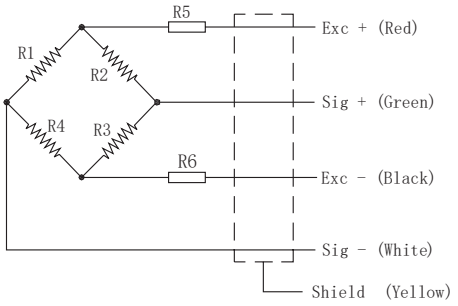

Dimension / Capacity	A	B	C	D	E	F	G	H	K	M
20t	76	82.6	48	150	56	9	31.8	48	10	M12
25,30,40t	100	117	65	150	76	12	38	38	14	M20
50,60t	107	127	66	200	81	12.7	58	64	14	M20
70t	125	142	91	250	86.5	13	58	64	14	M20
100t	165	184	104	300	111.8	20	70	70	20	M20
150t	165	184	104	300	111.8	20	70	78	20	M20
200t	233	250	157	500	137.5	25	100	112	36	M24
300,400t	233	250	157	500	137.5	25	108	112	36	M24