
# LP7138

## Dimensions:

Unit (mm)



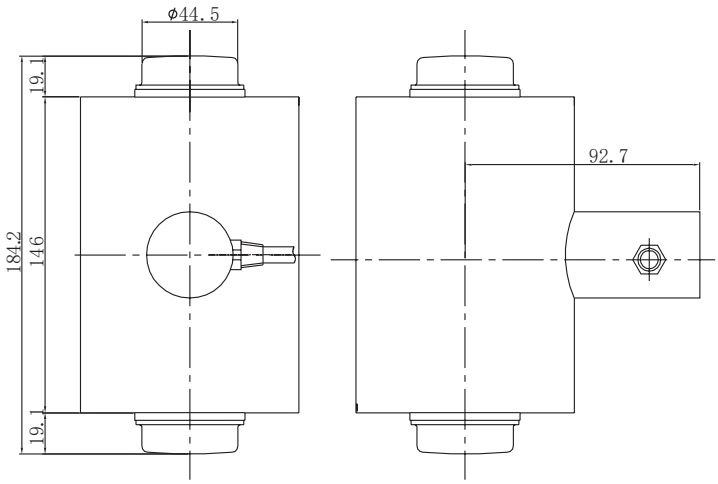


| | |
|---|---|
| Rated Capacity | 50/100/120klb |
| Accuracy Class | C3 |
| Rated Output | 2.0±0.002mV/V |
| Temperature effect on Zero | ±0.02%F.S/10°C |
| Temperature effect on Sensitity | ±0.02%F.S/10°C |
| Creep (30min) | ±0.02%F.S |
| Input Resistance | 1150±10Ω |
| Output Resistance | 1050±10Ω |
| Operating Temperature Range | -30~+70°C |
| Insulation Resistance | ≥5000MΩ (at 50VDC) |
| Safe Overload | 150%F.S |
| Destructive Load | 200%F.S |
| Excitation Recommend | 4~12VDC Max:15VDC |
| Construction | Alloy steel or stainless steel |
| Protection class | IP68 |
| Application for | Hopper, Soil, Testing machine, etc. |

## Cable length:

4 Core cable standard lengths: 14m(50~120klb)

Diameter: Φ6

Option: Customized cable length

## Connection mode:

