
LP7139



Dimensions:

Unit (mm)

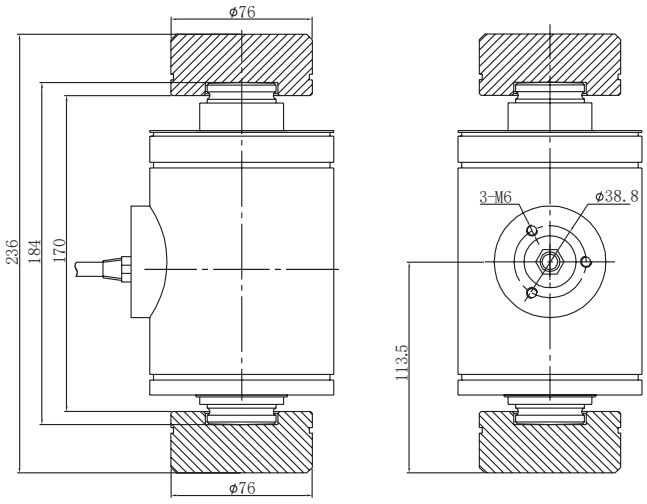

Rated Capacity	50/100klb;23/45t
Accuracy Class	C3
Rated Output	1.75±0.02mV/V
Temperature effect on Zero	±0.02%F.S/10℃
Temperature effect on Sensitity	±0.02%F.S/10℃
Creep (30min)	±0.02%F.S
Input Resistance	590±10Ω
Output Resistance	480±2Ω
Operating Temperature Range	-30~+70℃
Insulation Resistance	≥5000MΩ （at 50VDC）
Safe Overload	150%F.S
Destructive Load	200%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Alloy steel or stainless steel
Protection class	IP68
Application for	Hopper, Soil, Testing machine, etc.

Cable length:

4 Core cable standard lengths: 14m(50~100klb, 23~45t)

Diameter: Φ6

Option: Customized cable length

Connection mode:

