
LP7139A



Dimensions:

Unit (mm)

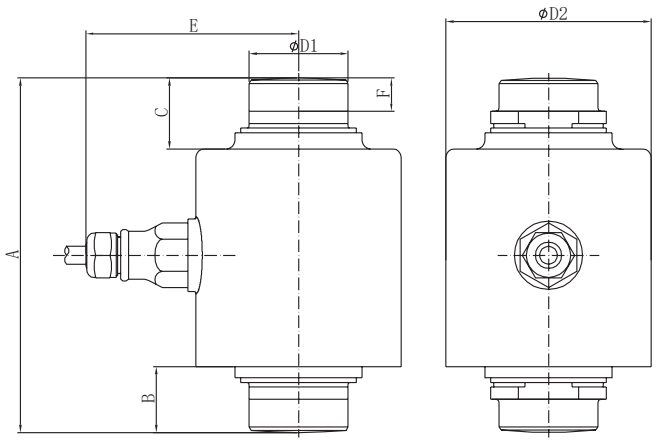

Rated Capacity	7.5/15/22.5/30/40/50/100/150/300t
Accuracy Class	C3
Rated Output	2.0±0.002mV/V
Temperature effect on Zero	±0.02%F.S/10°C
Temperature effect on Sensitity	±0.02%F.S/10°C
Creep (30min)	±0.02%F.S
Input Resistance	1150±50Ω
Output Resistance	1000±2Ω
Operating Temperature Range	-30~+70°C
Insulation Resistance	≥5000MΩ （at 50VDC）
Safe Overload	150%F.S
Destructive Load	200%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Alloy steel or stainless steel
Protection class	IP68
Application for	Hopper, Soil, Tank scales, Weighing modules, ect.


Cable length:

4 Core cable standard lengths: 12m(7.5~22.5t), 18m(30~300t)

Diameter: Φ6

Option: Customized cable length

Connection mode:

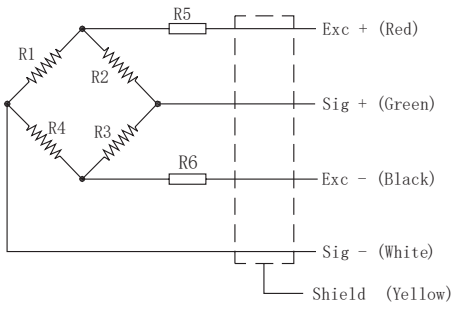

Dimension / Capacity	A	B	C	D1	D2	E	F
7.5t	89	17	23	28	65	75	11
15t	89	17	23	28	65	75	11
22.5t	89	17	23	28	65	75	11
30t	140	26	28	39	81	84	13
40t	150	31	33	39	81	84	13
50t	178	32	34	44	99	94	17
100t	178	38.5	38.5	62	141.3	93.8	17
150t	210	42.7	42.7	76.2	165.1	105.7	20.6
300t	280	55.9	55.9	100	165.1	105.7	25