


LP7140



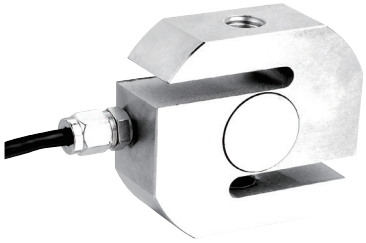

Dimensions

Unit (mm)

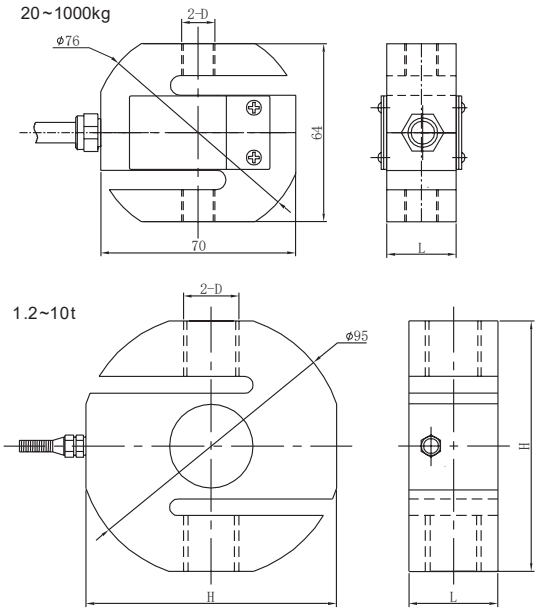

Rated Capacity	20/30/50/75/100/150/200/300/500/700kg 1/1.2/1.5/2/2.5/3/5/7.5/10t
Accuracy Class	C3
Rated Output	2.0±0.002mV/V
Temperature effect on Zero	±0.02%F.S/10℃
Temperature effect on Sensitity	±0.02%F.S/10℃
Creep (30min)	±0.02%F.S
Input Resistance	385±10Ω
Output Resistance	351±2Ω
Operating Temperature Range	-30~+70℃
Insulation Resistance	≥5000MΩ (at 50VDC)
Safe Overload	150%F.S
Destructive Load	200%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Alloy steel or stainless steel,IP67
Application for	Crane, Packing scales, Tension, etc.


Cable length:

4 Core cable standard lengths: 3m(20kg~1t) ,5m (2~7.5t),8m(10t)

Diameter: Φ5

Option: Customized cable length

Connection mode:

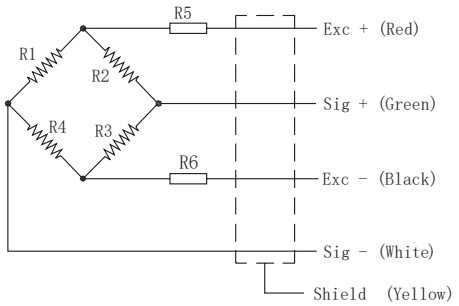

Dimension / Capacity	L	H	D
20~150kg	12	64	M8
200~500kg	20	64	M12
700~1000kg	25	64	M12
1.2~5t	32	90	M20
7.5t	40	90	M24
10t	50	110	M32*2