


LP7140A

Dimensions:

Unit (mm)

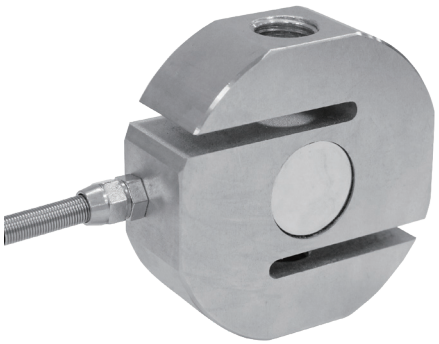

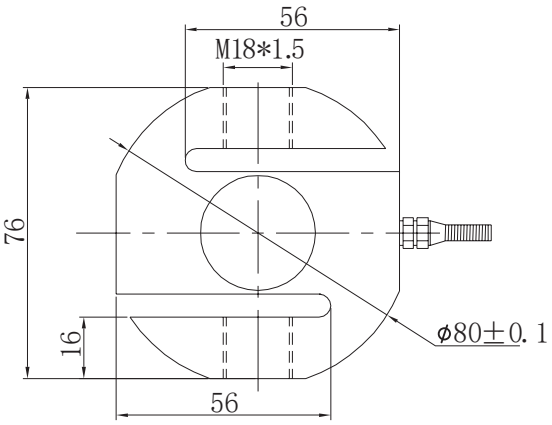

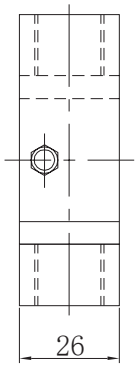

Rated Capacity	1/1.5/2t
Rated Output	2.0±0.002mV/V
Total error	±0.02%F.S
Temperature effect on Zero	±0.02%F.S/10℃
Temperature effect on Sensitity	±0.02%F.S/10℃
Creep (30min)	±0.02%F.S
Input Resistance	385±10Ω
Output Resistance	350±2Ω
Operating Temperature Range	-30~+70℃
Insulation Resistance	≥5000MΩ （at 50VDC）
Safe Overload	150%F.S
Destructive Load	300%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Alloy steel, IP67
Protection class	IP67
Application for	Crane, Packing scales, Tension, etc.

Cable length:

4 Core cable standard lengths: 3m(1~2t)

Diameter: Φ6

Option: Customized cable length

Connection mode:

