

LP7141B

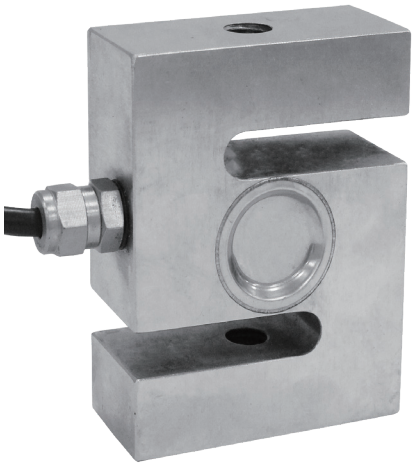

Dimensions:

Unit (mm)

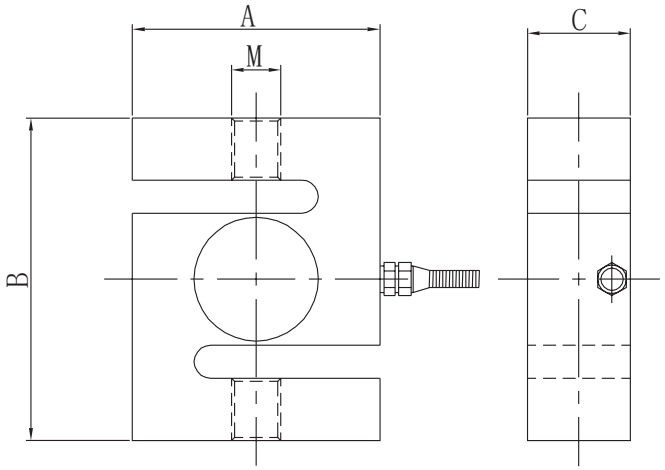

Rated Capacity	500kg, 1/2/5t
Rated Output	2.0±0.002mV/V
Total error	±0.03%F.S
Temperature effect on Zero	±0.02%F.S/10℃
Temperature effect on Sensitity	±0.02%F.S/10℃
Creep (30min)	±0.03%F.S
Input Resistance	385±10Ω
Output Resistance	350±2Ω
Operating Temperature Range	-30~+70℃
Insulation Resistance	≥5000MΩ （at 50VDC）
Safe Overload	150%F.S
Destructive Load	300%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Alloy steel
Protection class	IP67
Application for	Crane, Packing scales, Tension, etc.


Cable length:

4 Core cable standard lengths: 3m(500kg~5t)

Diameter: Φ5

Option: Customized cable length

Connection mode:

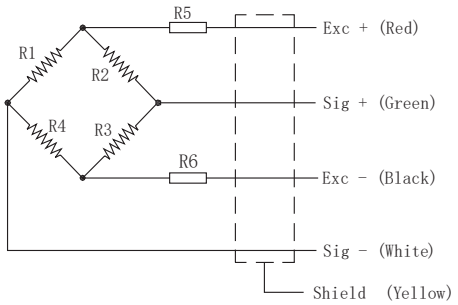

Dimension / Capacity	A	B	C	M
500kg	60	78	25	M12*1.75
1t	60	86	50	M16*2
2t	70	90	50	M16*2
5t	100	136	50	M24*2