

LP7141D

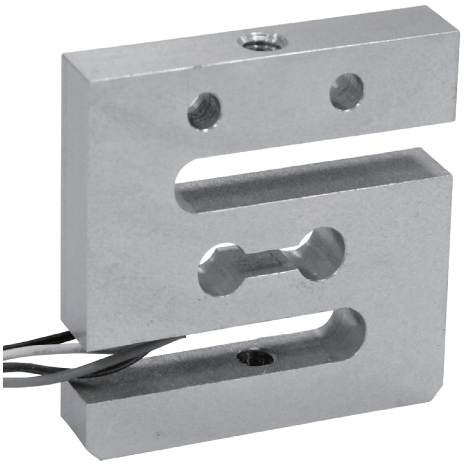

Dimensions:

Unit (mm)

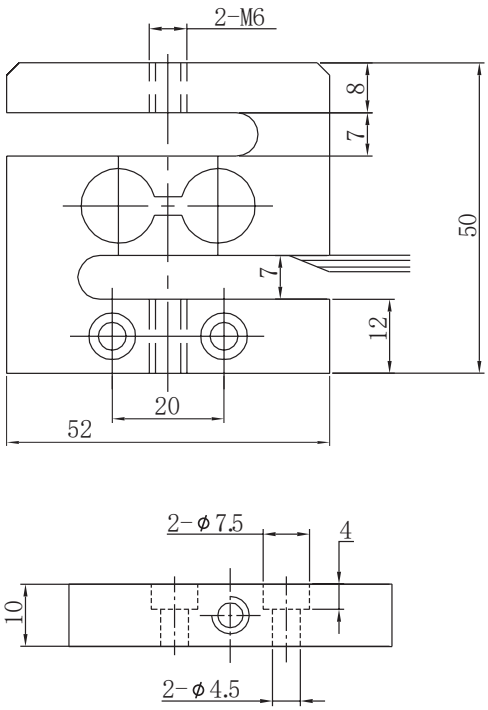

Rated Capacity	1/5/20/50kg
Rated Output	0.5±0.1mV/V(1kg) 1.0±0.2mV/V(5~50kg)
Total error	±0.2%F.S
Temperature effect on Zero	±0.05%F.S/10°C
Temperature effect on Sensitity	±0.05%F.S/10°C
Creep (30min)	±0.05%F.S
Input Resistance	350±5Ω
Output Resistance	350±5Ω
Operating Temperature Range	-30~+70°C
Insulation Resistance	≥5000MΩ （at 50VDC）
Safe Overload	120%F.S
Destructive Load	150%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Aluminum
Protection class	IP65
Application for	Crane, Packing scales, Tension, etc.

Cable length:

4 Core cable standard lengths: 0.2m(1~50kg)

Option: Customized cable length

Connection mode:

