

LP7142

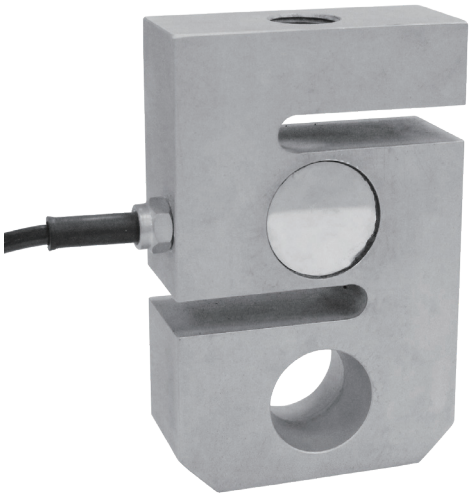

Dimensions:

Unit (mm)

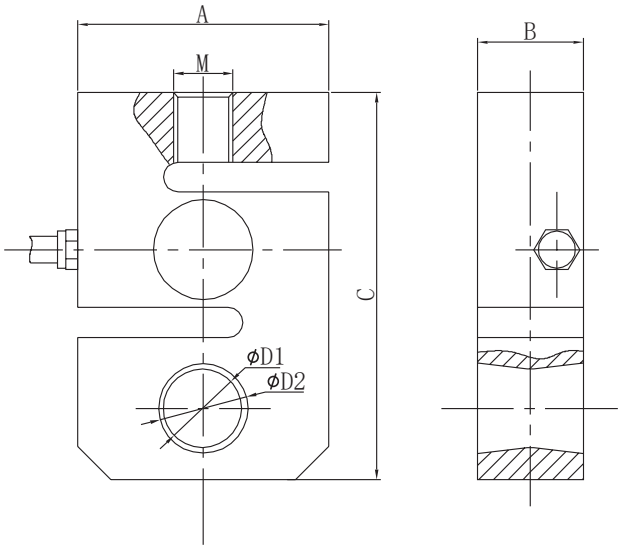

Rated Capacity	1/1.5/2/3/5/7.5/10/15t
Rated Output	2.0±0.002mV/V
Total error	±0.02%F.S
Creep (30min)	±0.02%F.S
Input Resistance	385±10Ω
Output Resistance	350±2Ω
Operating Temperature Range	-30~+70℃
Insulation Resistance	≥5000MΩ （at 50VDC）
Safe Overload	150%F.S
Destructive Load	200%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Alloy steel,stainless steel
Protection class	IP67
Application for	Crane, Packing scales, Tension, etc.


Cable length:

4 Core cable standard lengths: 3m(1~5t) ,6m (7.5t),10m(10t)

Diameter: Φ5

Option: Customized cable length

Connection mode:

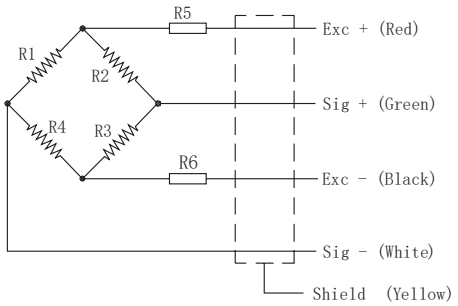

Dimension / Capacity	A	B	C	D1	D2	M
1~5	76	32	117	23.5	27	M18*1.5
7.5t	88	32	125	23.5	27	M24*1.5
10~15t	100	50	167	30	37	M30*2