

LP7142B

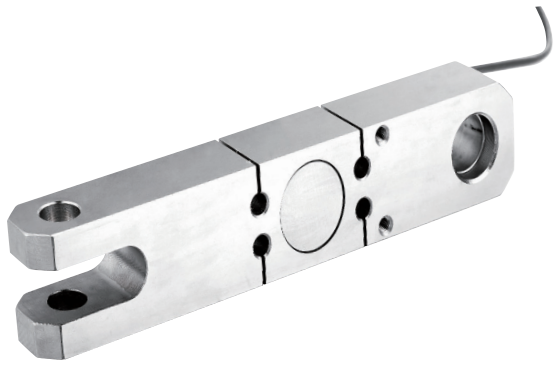

Dimensions:

Unit (mm)

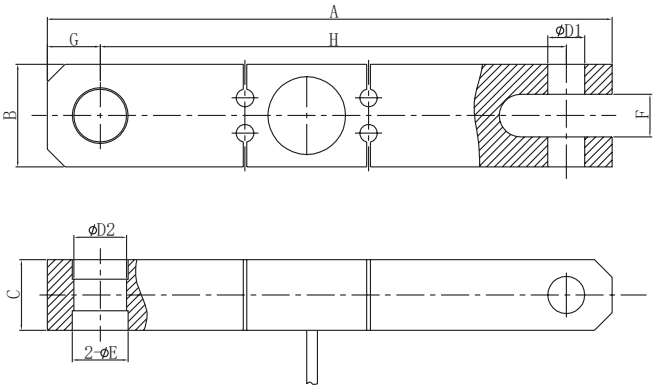

Rated Capacity	1/2/3/5/10/20t
Accuracy Class	C3
Rated Output	2.0±0.1mV/V
Temperature effect on Zero	±0.03%F.S/10°C
Temperature effect on Sensitity	±0.03%F.S/10°C
Creep (30min)	±0.02%F.S
Input Resistance	760±10Ω
Output Resistance	701±2Ω
Operating Temperature Range	-30~+70°C
Insulation Resistance	≥5000MΩ （at 50VDC）
Safe Overload	150%F.S
Destructive Load	200%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Alloy steel,stainless steel
Protection class	IP67
Application for	Crane, Packing scales, Tension, etc.


Cable length:

4 Core cable standard lengths: 2m(1~20t)

Diameter: Φ5

Option: Customized cable length

Connection mode:

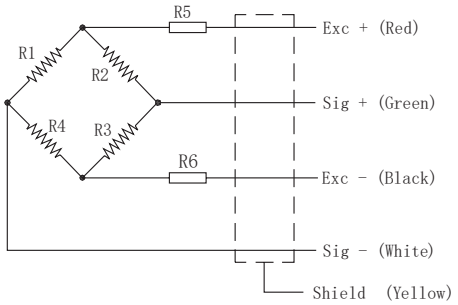

Dimension / Capacity	A	B	C	D1	D2	E	F	G	H
1~3t	320	58	40	21	30	32	24	30	264
5t	350	70	43	25	35	37	26	35.5	287
10t	377	85	53	32	40	42	32	42	201
20t	460	92	71	60	50.5	60	47	49	360