

LP7142F

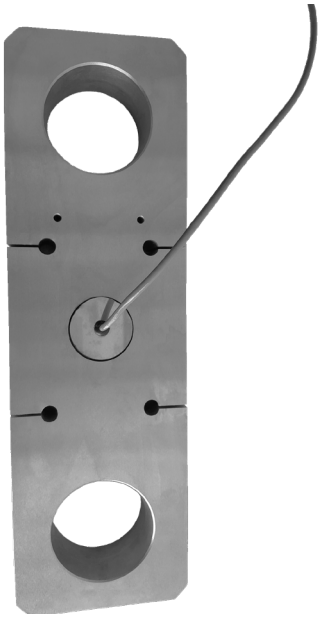


Dimensions:

Unit (mm)

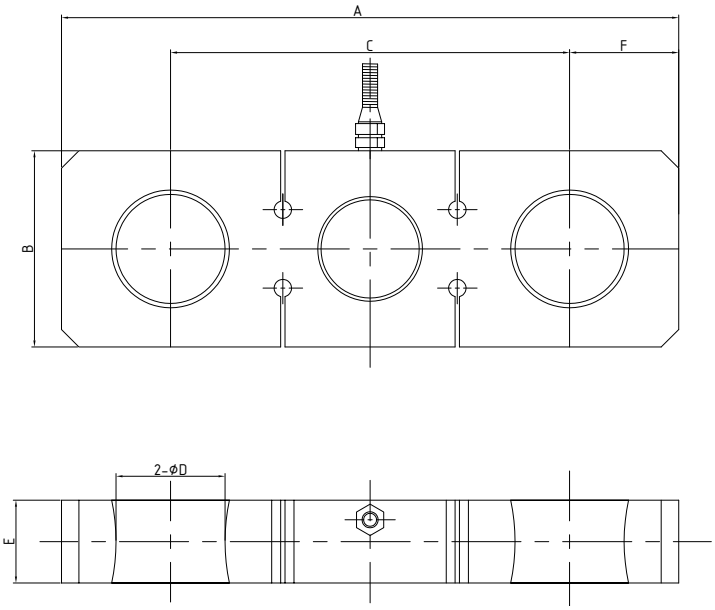

Rated Capacity	25/50/100/150/200/250klb
Accuracy Class	C3
Rated Output	2.0±0.1mV/V
Non-linearity	±0.02% F.S
Creep (30min)	±0.02%F.S
Input Resistance	385±10Ω
Output Resistance	351±2Ω
Operating Temperature Range	-10~+40℃
Insulation Resistance	≥5000MΩ （at 50VDC）
Safe Overload	150%F.S
Destructive Load	200%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Alloy steel or stainless steel, IP67
Application for	Crane, Packing scales, Tension, etc.

Connection mode:

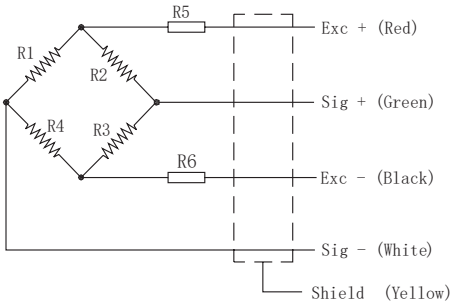

Capacity \ Dimension	A	B	C	D	E	F
25klb	283	90	183	50	38	50
50klb	318	110	210	51	43	54
100klb	420	130	300	71.4	50	60
150klb	500	160	350	80	60	75
200klb	550	170	380	96.4	70	85
250klb	600	180	400	102	80	100