

LP7142L

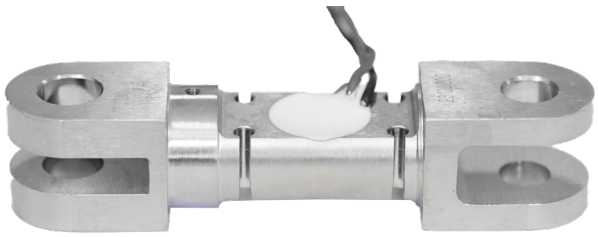

Dimensions:

Unit (mm)

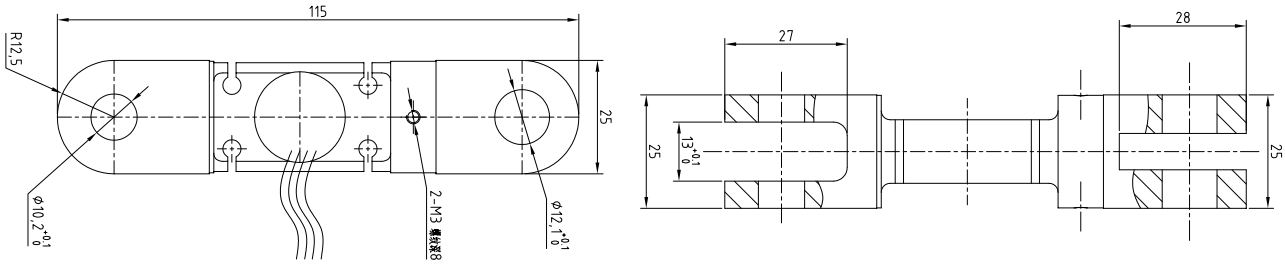

Rated Capacity	500kg
Accuracy Class	D1
Rated Output	1.5±0.1mv/v
Non-linearity	±0.05% F.S
Creep (30min)	±0.05% F.S
Input Impedance	1030±20Ω
Output Impedance	1001±3Ω
Operation Temperature	-10~+40℃
Insulation Resistance	≥5000MΩ (at 50VDC)
Safe Overload	150%F.S
Destructive Load	200%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Alloy Steel IP66
Application for	Crane scale, Testing equipment

Connection mode:

