

LP7143

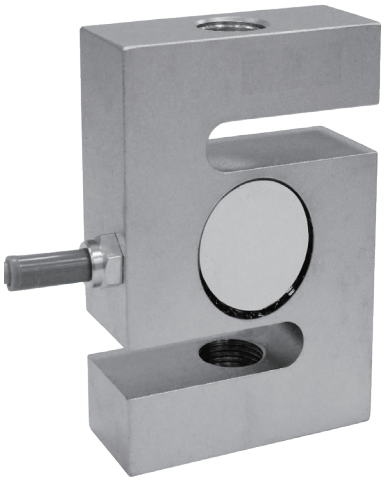

Dimensions:

Unit (mm)

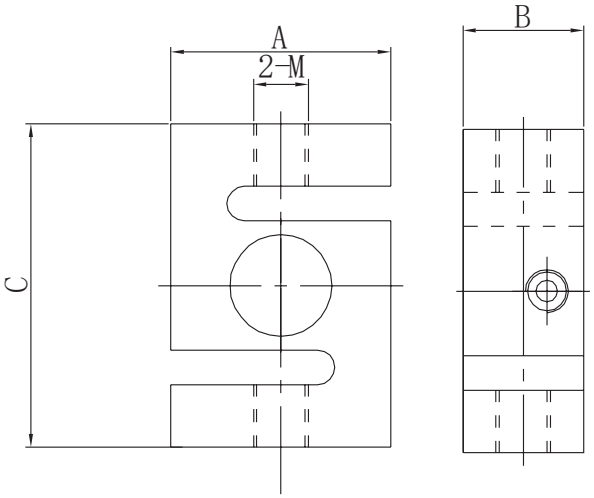

Rated Capacity	500/750 kg, 1.5/3t
Rated Output	2.0±0.002mV/V
Total error	±0.02%F.S
Temperature effect on Zero	±0.02%F.S/10℃
Temperature effect on Sensitity	±0.02%F.S/10℃
Creep (30min)	±0.02%F.S
Input Resistance	385±10Ω
Output Resistance	350±2Ω
Operating Temperature Range	-30~+70℃
Insulation Resistance	≥5000MΩ (at 50VDC)
Safe Overload	150%F.S
Destructive Load	300%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Alloy steel, stainless steel
Protection class	IP67
Application for	Crane, Packing scales, Tension, etc.


Cable length:

4 Core cable standard lengths: 3m(500kg~1.5t), 6m(3t)

Diameter: Φ5

Option: Customized cable length

Connection mode:

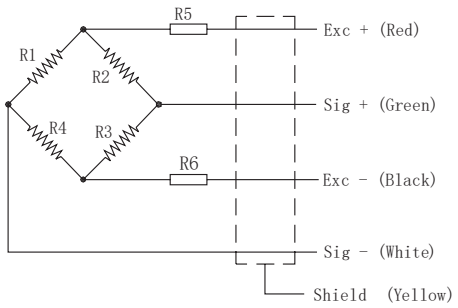

Dimension / Capacity	A	B	C	M
500kg~1.5t	50.8	28	76.2	M12*1.75
3t	76.2	32	104	M20*1.5