

LP7144

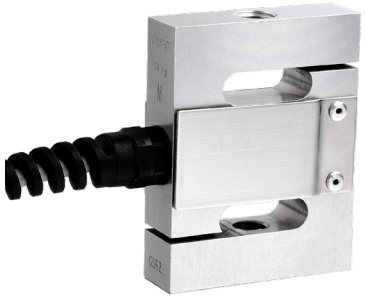

Dimensions:

Unit (mm)

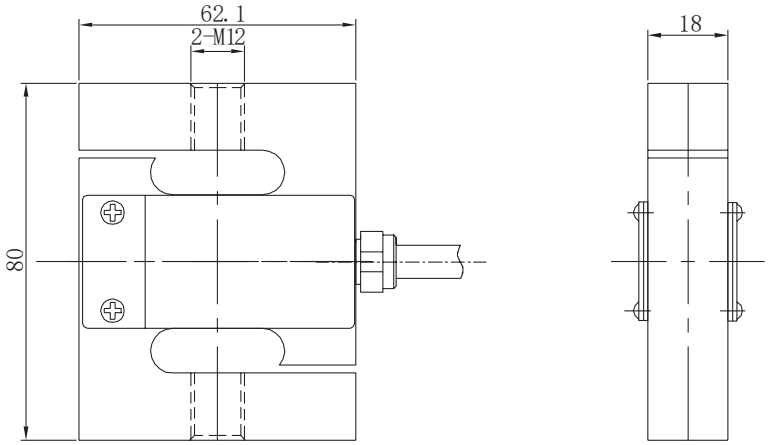

Rated Capacity	50/100/150/200/300/500/750/1000kg
Accuracy Class	C3
Rated Output	2.0±0.002mV/V
Temperature effect on Zero	±0.02%F.S/10℃
Temperature effect on Sensitity	±0.02%F.S/10℃
Creep (30min)	±0.02%F.S
Input Resistance	400±20Ω
Output Resistance	350±3Ω
Operating Temperature Range	-30~+70℃
Insulation Resistance	≥5000MΩ (at 50VDC)
Safe Overload	120%F.S
Destructive Load	150%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Aluminum (50~300kg) Alloy Steel (500~1000kg)
Protection class	IP67
Application for	Crane, Packing scales, Tension, etc.

Cable length:

4 Core cable standard lengths: 3m(50kg~1t)

Diameter: Φ5

Option: Customized cable length

Connection mode:

