

LP7145B

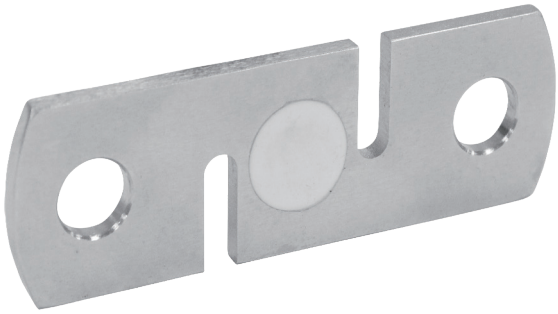

Dimensions:

Unit (mm)

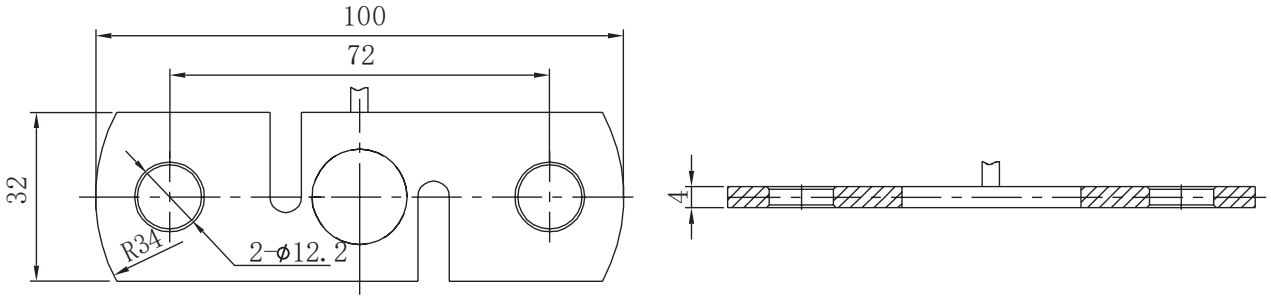

Rated Capacity	200/300/500kg
Total error	±0.03%F.S
Rated Output	1.2±0.1mV/V
Temperature effect on Zero	±0.03%F.S/10℃
Temperature effect on Sensitity	±0.03%F.S/10℃
Creep (30min)	±0.03%F.S
Input Resistance	1000±10Ω
Output Resistance	1000±2Ω
Operating Temperature Range	-30~+70℃
Insulation Resistance	≥5000MΩ （at 50VDC）
Safe Overload	150%F.S
Destructive Load	200%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Alloy steel or stainless steel
Protection class	IP67
Application for	Crane, Packing scales, Tension, etc.

Cable length:

4 Core cable standard lengths: 2m(200~500kg)

Diameter: Φ3.8

Option: Customized cable length

Connection mode:

