

LP7147

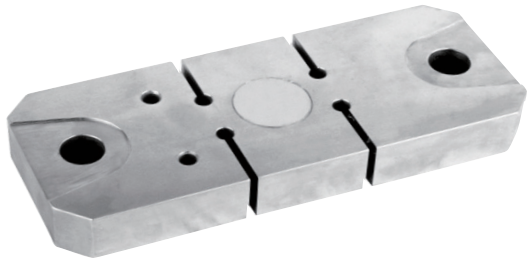

Dimensions:

Unit (mm)

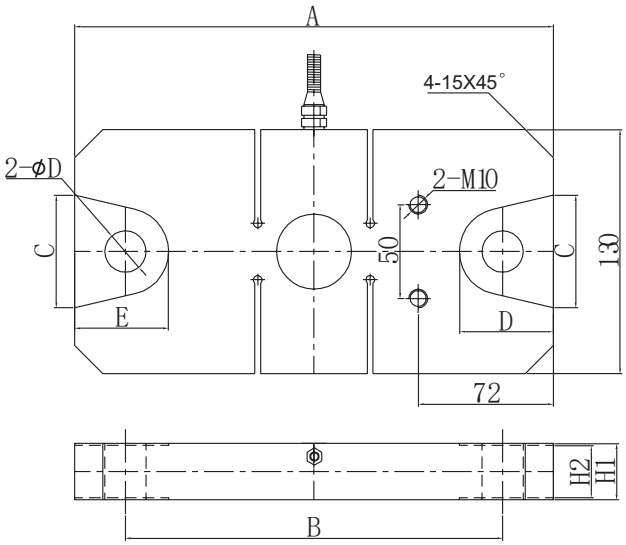

Rated Capacity	5/10t
Total error	±0.05%F.S
Rated Output	2.0±0.002mV/V
Temperature effect on Zero	±0.03%F.S/10°C
Temperature effect on Sensitity	±0.03%F.S/10°C
Creep (30min)	±0.03%F.S
Input Resistance	385±10Ω
Output Resistance	350±2Ω
Operating Temperature Range	-30~+70°C
Insulation Resistance	≥5000MΩ (at 50VDC)
Safe Overload	150%F.S
Destructive Load	200%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Alloy steel, IP67
Protection class	IP67
Application for	Crane, Packing scales, Tension, etc.


Cable length:

4 Core cable standard lengths: 12m(5~10t)

Diameter: Φ5

Option: Customized cable length

Connection mode:

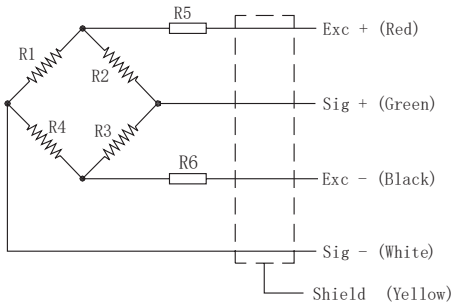

Dimension / Capacity	A	B	C	D	E	H1	H2
5t	255	201	60	22	50	30	28
10t	295	215	64	28	70	40	38