
LP7150A



Dimensions:

Unit (mm)

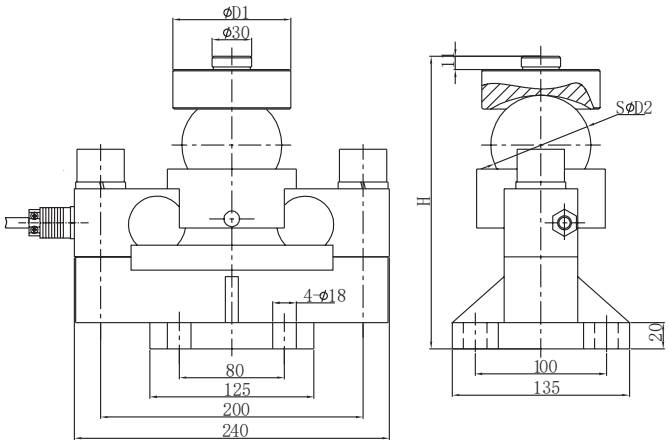

Rated Capacity	10/15/20/25/30/40t
Accuracy Class	C3
Rated Output	2.0±0.002 mV/V
Temperature effect on Zero	±0.02%F.S/10℃
Temperature effect on Sensitity	±0.02%F.S/10℃
Creep (30min)	±0.02%F.S
Input Resistance	760±10Ω
Output Resistance	702±2Ω
Operating Temperature Range	-30~+70℃
Insulation Resistance	≥5000MΩ (at 50VDC)
Safe Overload	150%F.S
Destructive Load	300%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Alloy Steel
Protection class	IP68
Application for	Weighing bridge, Truck scales, Weighing modules, etc.

Cable length:


Metal shield cable with protection sleeve

4 Core cable standard lengths: 6m(10~40t)

Diameter: Φ6

Option: Customized cable length

Connection mode:

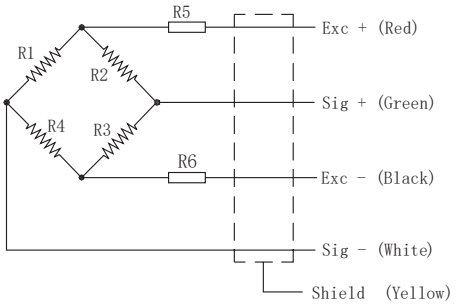

Capacity	D1	D2	H
10,15,20,25,30t	85~88	76.2	224.7
40t	88	76.2	230.7