

LP7150B

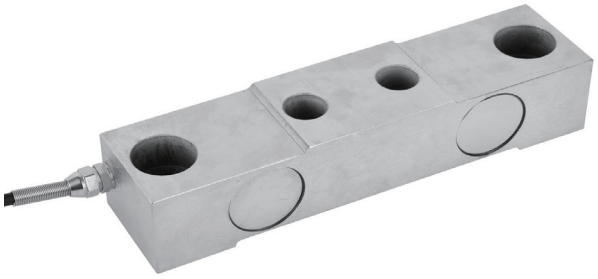

Dimensions:

Unit (mm)

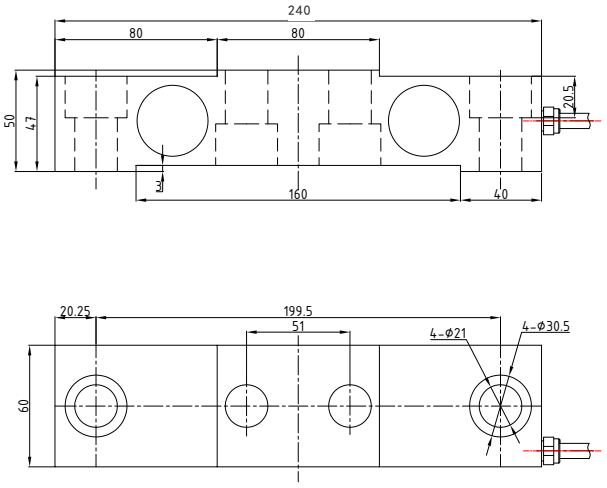

Rated Capacity	10/20/30/40t
Total error	±0.02%F.S
Rated Output	2.0±0.002 mV/V
Temperature effect on Zero	±0.02%F.S/10°C
Temperature effect on Sensitity	±0.02%F.S/10°C
Creep (30min)	±0.02%F.S
Input Resistance	700±10Ω
Output Resistance	702±2Ω
Operating Temperature Range	-30~+70°C
Insulation Resistance	≥5000MΩ （at 50VDC）
Safe Overload	150%F.S
Destructive Load	200%F.S
Excitation Recommend	4~12VDC Max:15VDC
Construction	Alloy Steel
Protection class	IP67
Application for	Tank scales, Travelling crane scales

Cable length:

4 Core cable standard lengths: 16m(10~40t) , 20m(50t)

Diameter: Φ6

Option: Customized cable length

Connection mode:

