

LP7159E



Dimensions:

Unit (mm)

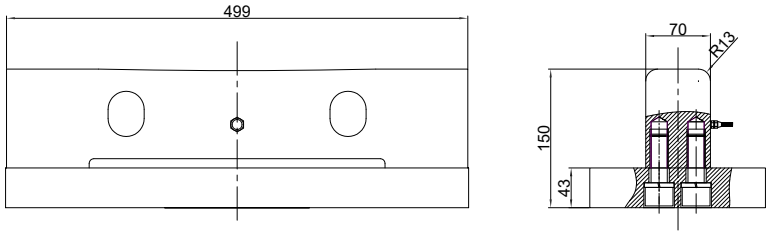

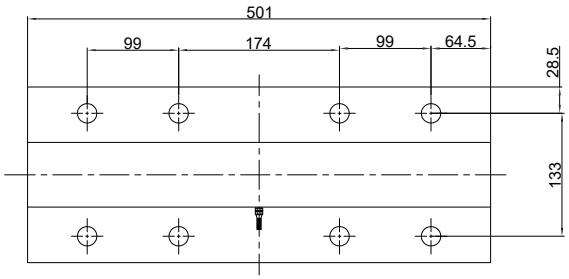

Rated Capacity	10/20/30/40t
Rated Output	1.0±0.005mv/v
Non-linearity	±0.1% F.S
Creep(30min)	±0.05% F.S
Input Impedance	700±10Ω
Output Impedance	700±2Ω
Operation Temperature	-10~+40℃
Insulation Resistance	≥5000MΩ （at 50VDC）
Safe overload	150%F.S
Destructive Load	300%F.S
Excitation Recommended	4~12VDC, Max:15VDC
Construction	Alloy steel or stainless steel, IP67
Application for	Static steel embody scales, Railway scales, Overhead crane scales

Connection mode:

